

This 7 day digital programmable timer is ideal for use in any 12V DC appliance which requires automation.

It can be configured to switch at up to 16 different times during a 24 hour period. In addition, it can be programmed to operate on a wide variety of days. eg. Daily, Week days only, Weekends only, Every second day, or selected group of days.

The BRX12A25K allows for Switch-on and switch-off times to be set for each program. i.e. allows a different "on" duration for each program.

The timer has three modes of operation. In the "auto" mode, the timer automatically switches at the pre-programmed times. In the "on" mode, the switch is always on regardless of the timer program setting. In the "off" mode, the timer will not switch regardless of the program settings. The mode of operation can only be changed when power is applied to the switch.

In the event of a power failure, the switch retains its program data via backup battery

- Voltage: 12V DC
- Max Total Load: 25A Resistive Load
- Standby consumption: <0.03A
- Dimensions: 120mm x 72mm x 50mm
- Weekly & Daily Programming.
- Timing Control Range: From 1 minute to 168 Hours
- Up to 16 events per day or 112 events per week.

Example: You can set 1 "ON & OFF" event to repeat the 7 days of the week and you will be using only 1 out of the 16 events allowed.

- 16 ON and 16 OFF events can be programmed independently.
- Accuracy: <±2 seconds per day
- Operating temperature: +10 ~+50 C
- Relative Humidity: 95%
- Guide Rail & Wall mounting & Panel
- Battery backup
- Manual override eliminates the need for an additional helm switch.
- A 25A fuse is strongly recommended for each installation as it will assure a long life for the timer as it will avoid overload of the system.

**We ship worldwide.**

- Hablamos Español.      - Nous parlons Français.

**PROGRAMMABLE 12V DC TIMER SWITCH**




**Part Number: BRX12A25K - 25 AMPS**




**U\$ 97.00**

- 12V DC Timer for well pump
- 12V DC Timer for solar Irrigation systems
- 12V DC Timer for diesel fuel polishing systems
- 12V DC Timer for LED signs
- 12V DC timer for deer feeding devices
- 12V DC timer for bird feeding devices
- 12V DC Timer for attic exhaust fan.
- 12V DC timer for solar water fountain and many other applications.

**DIMENSIONS (mm):**

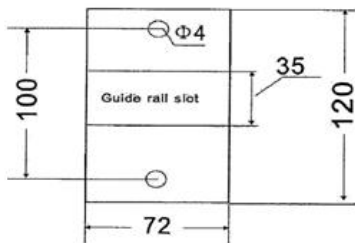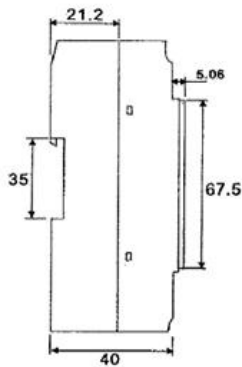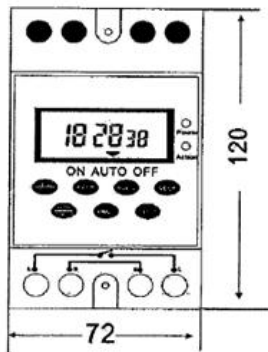

**CONNECTIONS:**

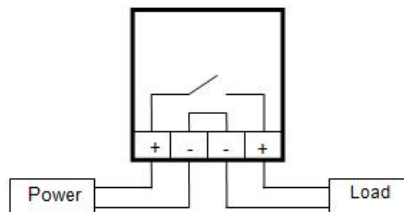

- 12 VOLT DC TIMER 25 Amps RESISTIVE LOAD, 12V DC TIMER 25 Amps RESISTIVE LOAD, 12V DC TIMER 25 Amps, 12 VOLT TIMER 25 Amps, 12 VOLT TIMER HIGH AMPS, 12 VOLT TIMER HIGH OUTPUT, 12V DC TIMER 20 Amps, PROGRAMMABLE 12V DC DIGITAL TIMER 25 AMPS, PROGRAMMABLE 12V DC TIMER 25 AMPS, 12 VOLTS PROGRAMMABLE TIMER 25 AMPS, 12 VOLT TIMER 25 AMP - 12V DC Timer for diesel polishing systems
- 12V DC timer for deer feeding devices
  - 12V DC Timer for solar Irrigation systems
  - 12V DC Timer for attic exhaust fan.
  - 12V DC Timer for well pump.
  - 12V DC timer for solar water fountain and many other applications.